



# PTWA-5G7G-200

## 200W P1dB CW TWT Amplifier

### Traveler Wave Tube (TWT) Power RF Amplifier

The PTWA-5G7G-200 is a TWT 200W P1dB (CW) Ruggedized RF Amplifier which covers frequency range from 5GHz to 7GHz. This amplifier can achieve high efficiency operation with proven reliability as is designed with the robust engineering and employment of the most advanced devices and components. The amplifier comes with 2 years warranty including the TWT.

Parameter	Specification
<b>Electrical</b>	
Frequency Range	5-7GHz
Output Power	200W P1dB, CW nominal
Internal Protection	Up to 0dBm for no damage
Gain @ rated power	55dB
Gain Adjustment	0 to 30dB
Input /Output Impedance	50 ohms(VSWR 2.0:1)
Noise Figure	≤ 35dB
RF Input / Output Connectors	RF Input Type N Female / RF Output 7/16
Modulation	AM / FM / Pulse
Spurious	-50dBc
Harmonics (nom.)	-20dBc
<b>@Rated Power</b>	
Prime Power	220V AC +/-10%, 50/60 Hz, Three Phase 5 wires
<b>Mechanical</b>	
Configuration	Racks mounts 19"W x 26.2"D x 8.75"H
Cooling System	Air cooled ,self contained
Shock MIL Standards	MIL-STD-810C, method 516.2, Procedure I ,15G. 11 ms 1/2 sine
Vibration MIL Standards	MIL-STD-810C, method 514.2, procedure VIII, curves V, 1 hr/axis


THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Temperature	0° to 45° C
Non-operating Temp	0° to 60°C
Humidity	95% without condensation
Altitude	15,000 feet

**OPTIONS**

- 001 VSWR Protection against any output mismatch; will operate without damage or oscillation against any magnitude and phase of source and load impedance.
- 002 Alternate Prime Power (specify at time of order).
- 003 Ethernet Remote Control.
- 004 Forward RF Sample Port Type N Female -60dBc nominal on the Front or Rear Panel.
- 005 Reflected RF Sample Port Type N Female -60dBc nominal on the Front or Rear Panel.
- 006 RF Input / Output Connectors on the Front Panel (Specify front or rear at time of order).
- 007 Internal Systems Diagnostics.
- 008 Filament/Beam Elapsed Time Metering in hours.
- 009 RF Safety Interlock, type BNC Connector.
- 010 Forward/Reflected Power Indication simultaneously on Front Panel display.

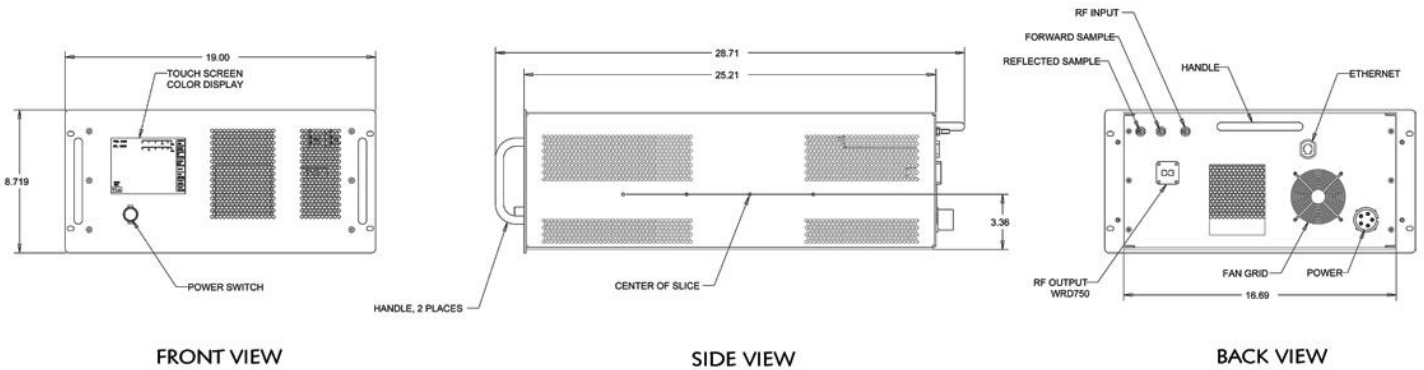

**PowerMax Innovation, Inc.**  
 1243 Reamwood Ave., Sunnyvale,  
 CA 94089 USA.  
 Tel.: (408) 541-0888  
 Fax.: (408) 541-1886  
 E-Mail: [sales@pmaxii.com](mailto:sales@pmaxii.com)  
 Web: [www.pmaxii.com](http://www.pmaxii.com)

THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.